

PANKA 彭克

空气流动系统解决方案





暖通空调/冷链 通风系统

EC/AC轴流风机



**AIR SYSTEM
SOLUTIONS**

Product
Catalogue


EC轴流风机 PEF200

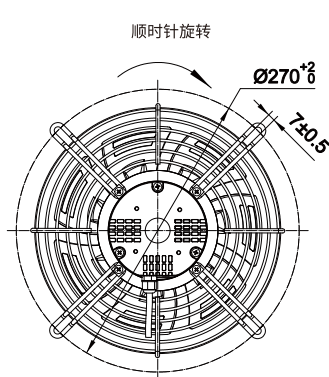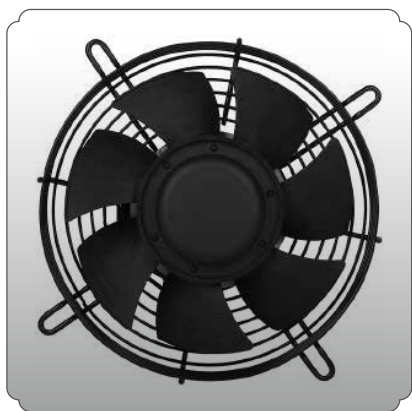


PEF 72-200SB*E

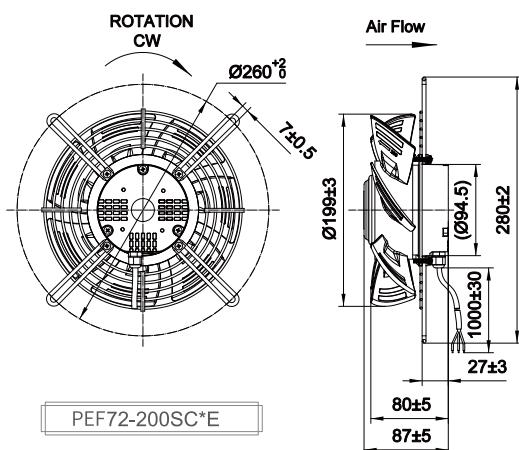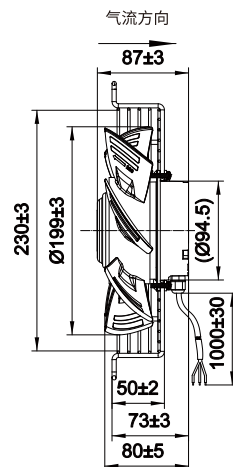


PEF72-200SC*E

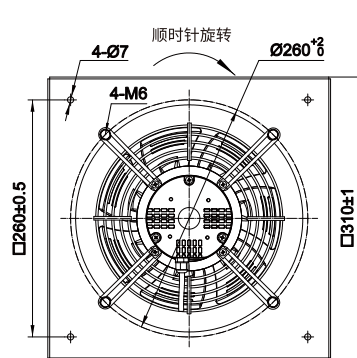

PEF 72-200SD*E

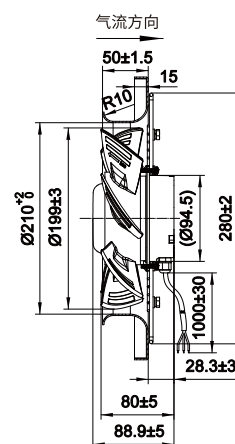



性能曲线

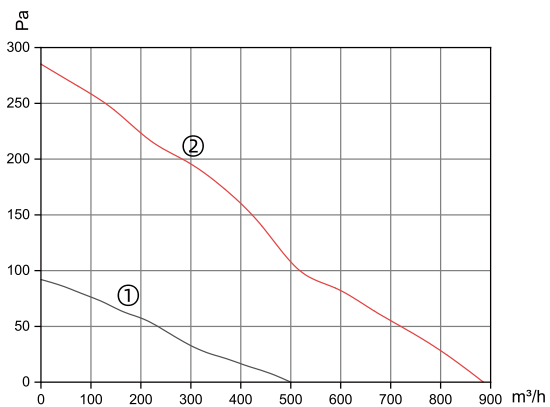



工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40℃~60℃

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF72-200SB*E	230	50/60	0.12	13	1400	47	500	①
PEF72-200SC*E								
PEF72-200SD*E								
PEF72-200SB*E	230	50/60	0.40	53	2500	64	885	②
PEF72-200SC*E								
PEF72-200SD*E								


EC轴流风机 PEF250

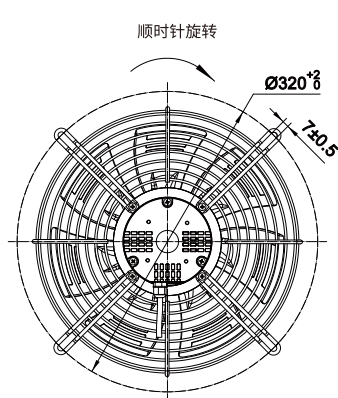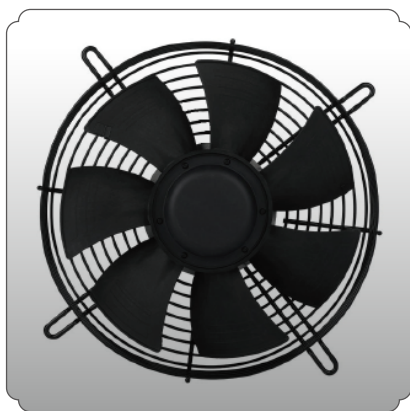


PEF72-250SB*E

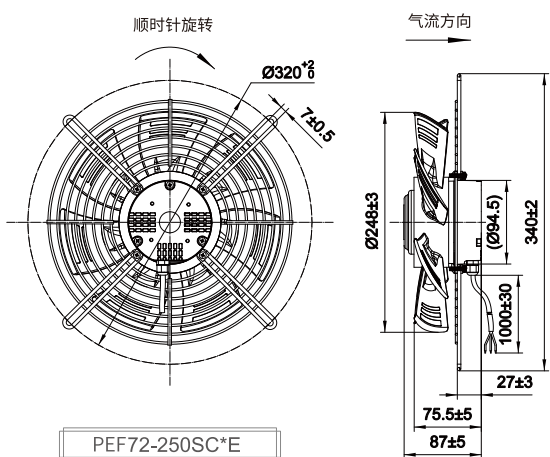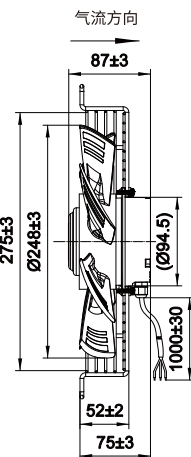


PEF72-250SC*E

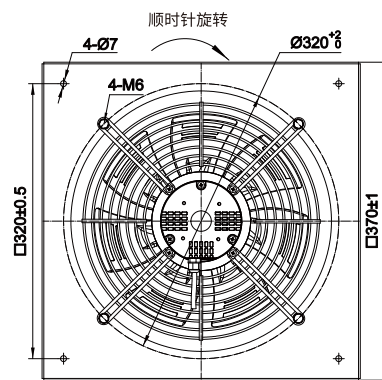

PEF72-250SD*E

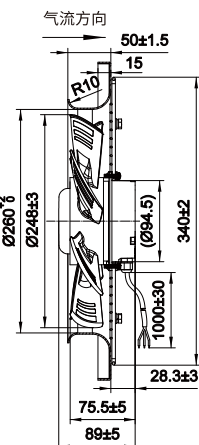





性能曲线

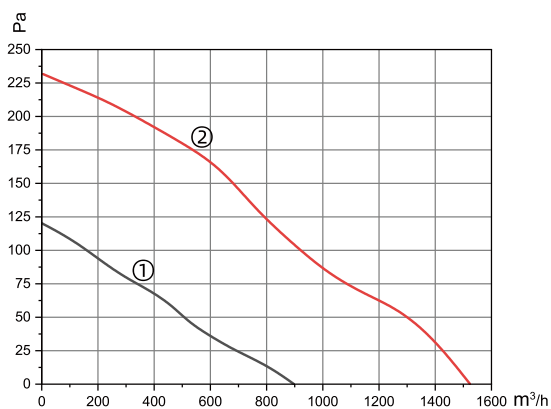


工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40℃~60℃

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF72-250SB*E	230	50/60	0.17	21	1400	54	860	①
PEF72-250SC*E								
PEF72-250SD*E								
PEF72-250SB*E	230	50/60	0.72	101	2500	70	1524	②
PEF72-250SC*E								
PEF72-250SD*E								

EC轴流风机 PEF300

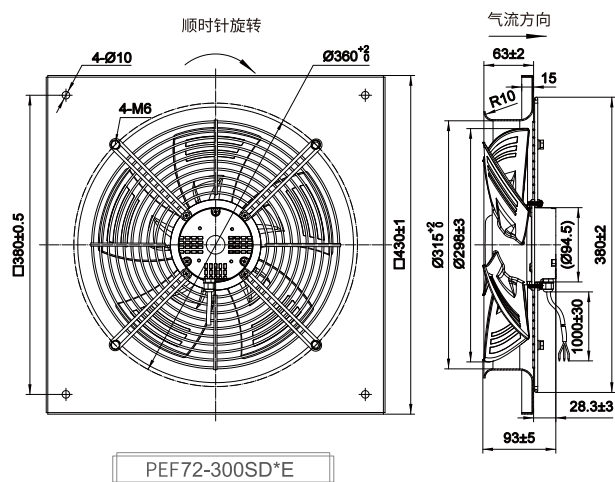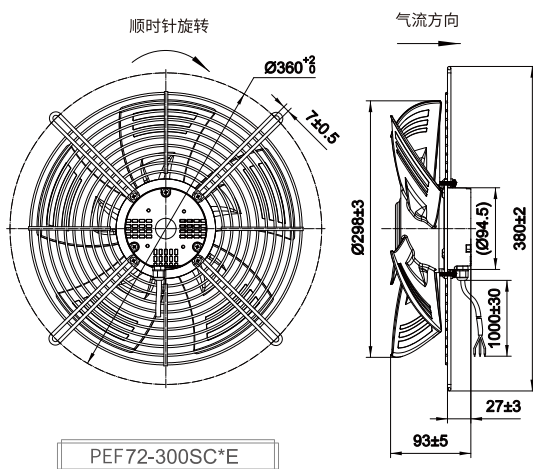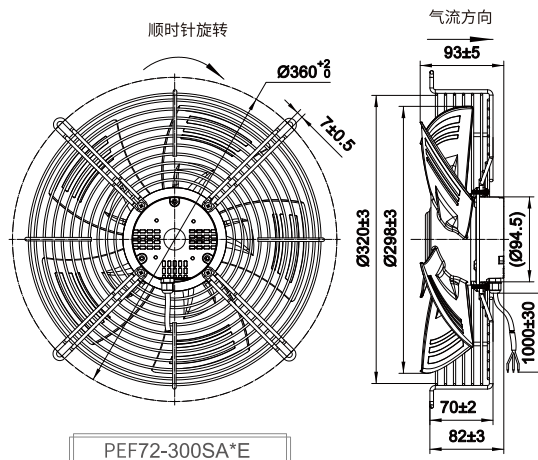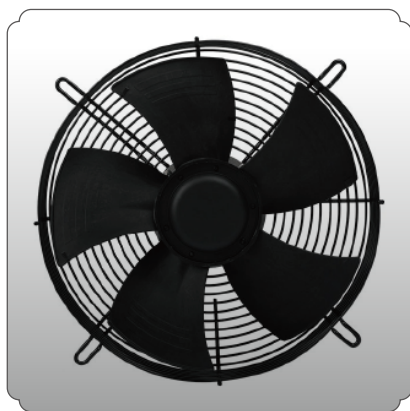





性能曲线

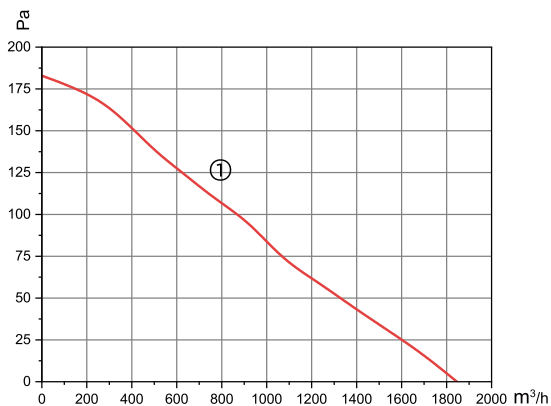


工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40°C~60°C

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF72-300SA*E	230	50/60	0.34	45	1400	58	1845	①
PEF72-300SB*E								
PEF72-300SC*E								
PEF72-300SD*E								

EC轴流风机 PEF350

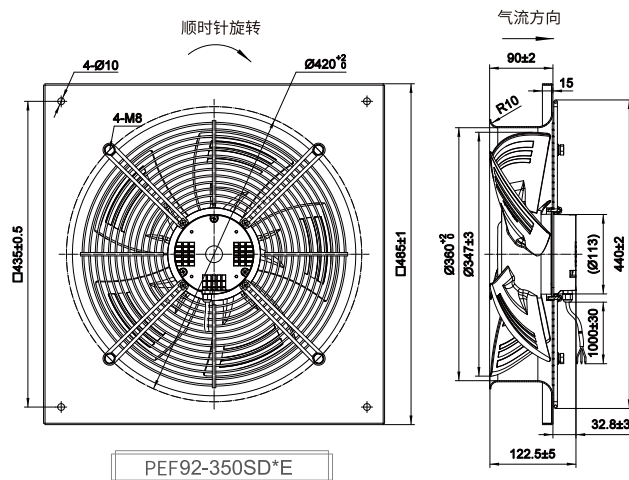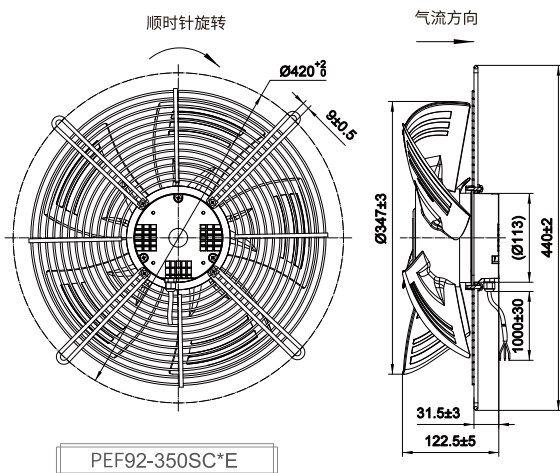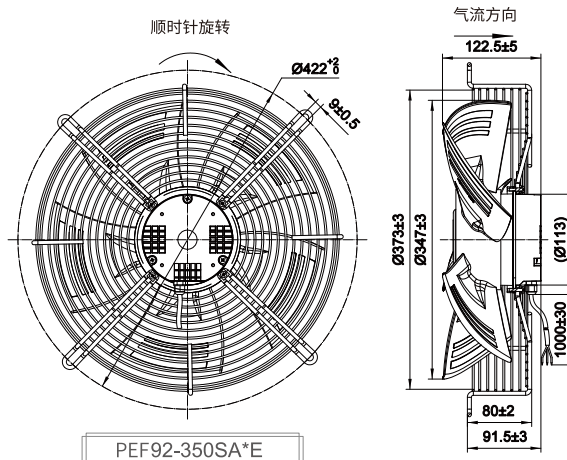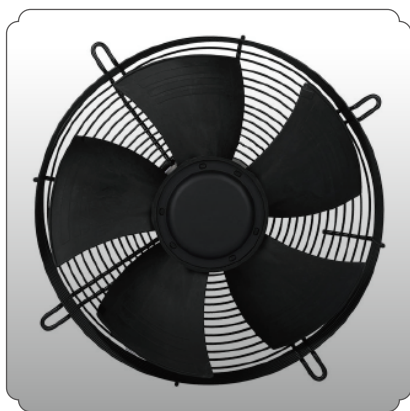





性能曲线

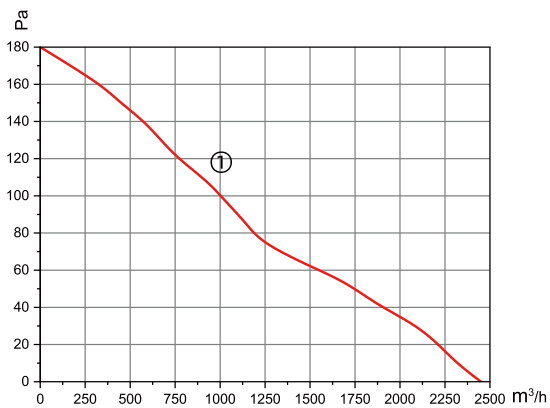


工作方式: S1
 绝缘等级: F级
 防护等级: IP54
 环境温度: -40℃~60℃

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF92-350SA*E	230	50/60	0.83	120	1350	64	2450	①
PEF92-350SC*E								
PEF92-350SD*E								
PEF 92-350S**H	3~380	50/60	0.25					

EC轴流风机 PEF400

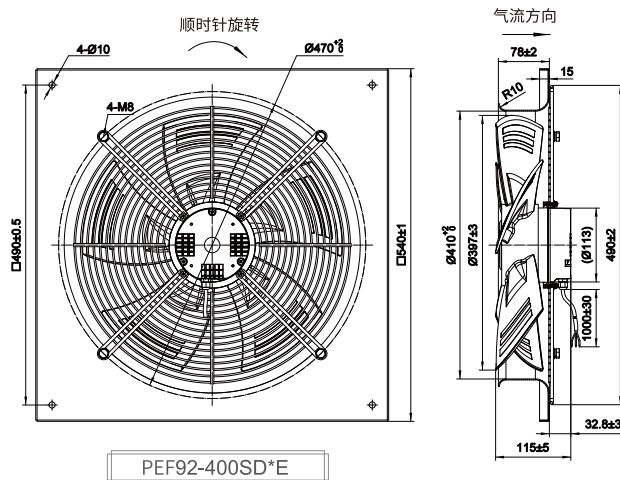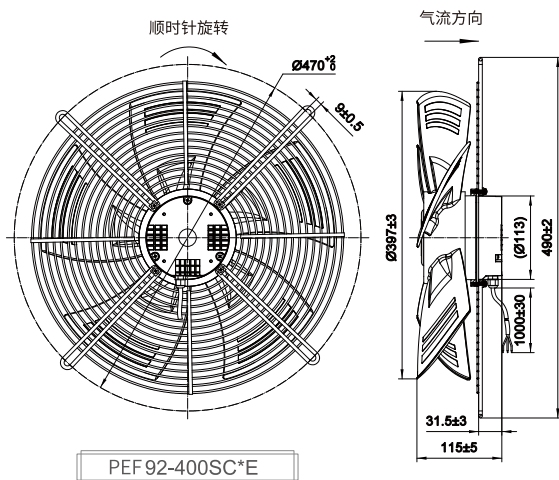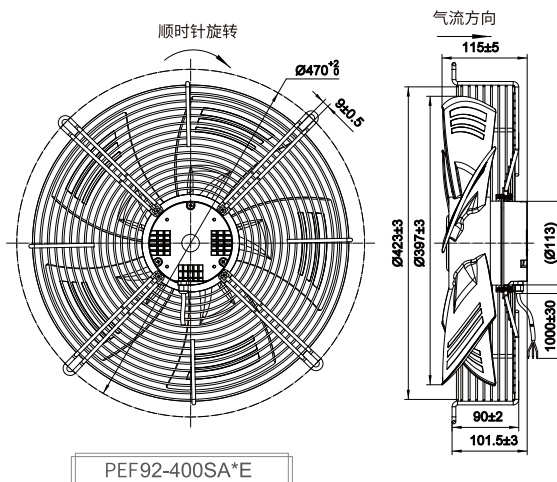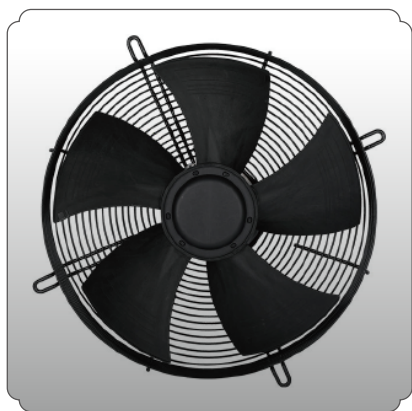





性能曲线

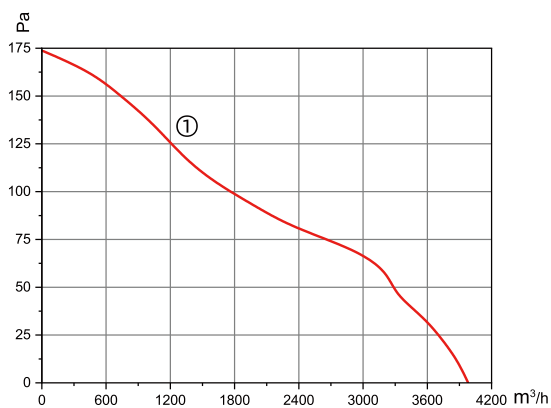


工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40℃~60℃

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF92-400SA*E	230	50/60	1.10	165	1450	67	3980	①
PEF92-400SC*E								
PEF92-400SD*E								
PEF92-400S**H	3~380	50/60	0.35					

EC轴流风机 PEF450

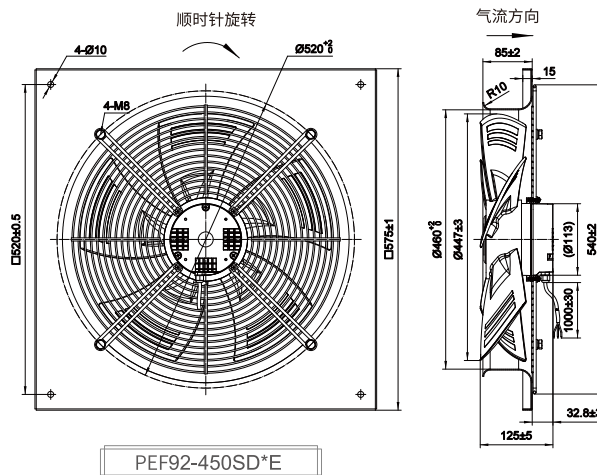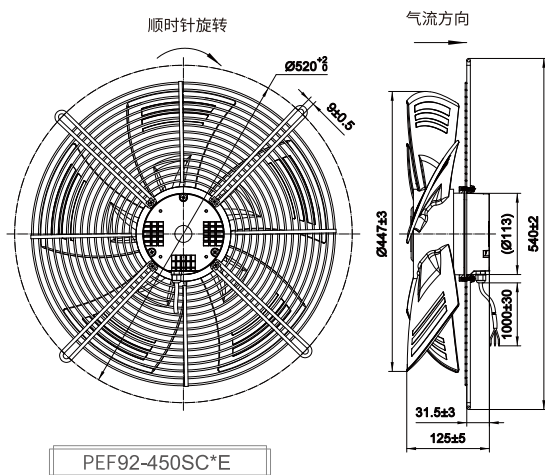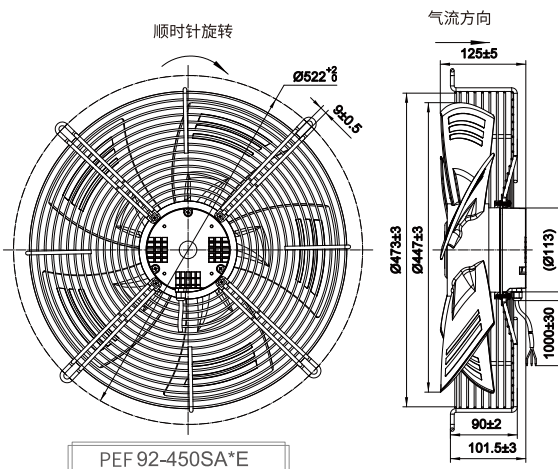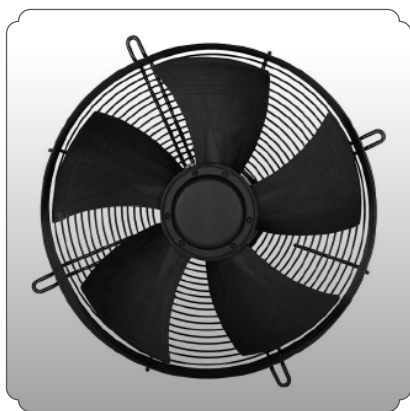



性能曲线

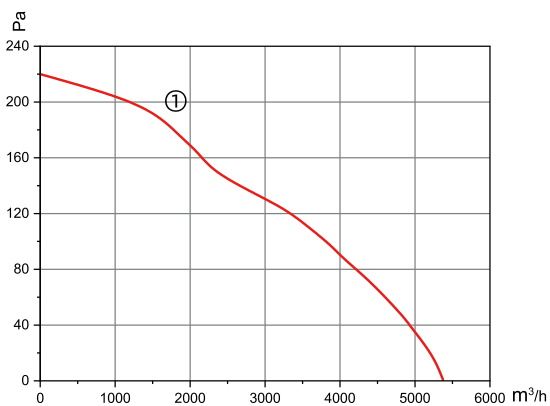



工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40°C~60°C

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF 92-450SA*E	230	50/60	1.16	174	1450	67	5380	①
PEF92-450SC*E								
PEF92-450SD*E								
PEF 92-450S**H	3~380	50/60	0.37					


EC轴流风机 PEF500

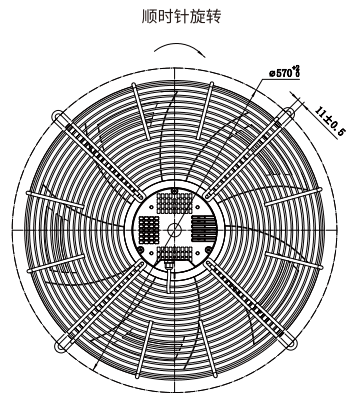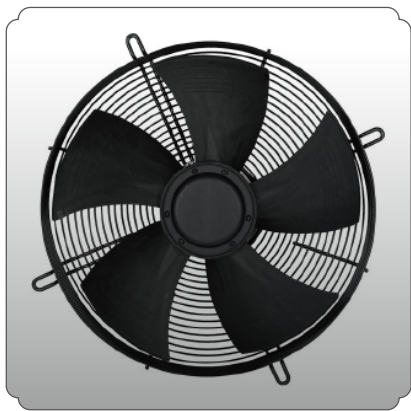


PEF92-500SA*E

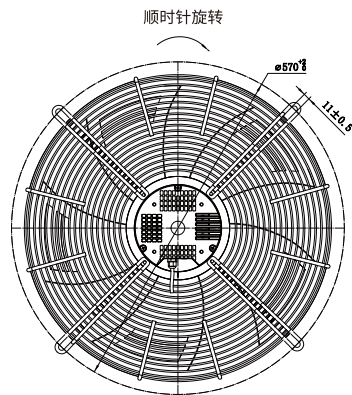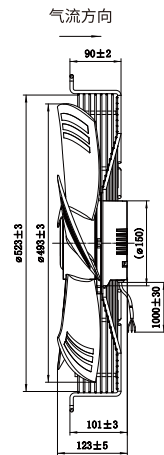

PEF92-500SB*E

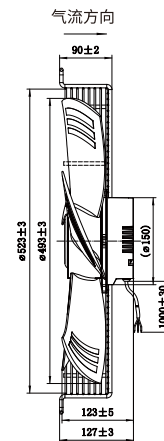



性能曲线

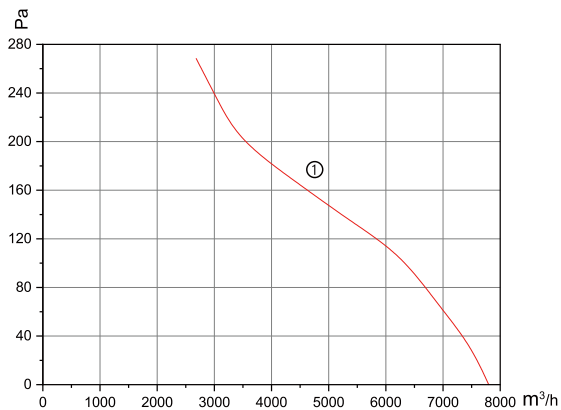



工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40℃~60℃

标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF92-500SA*E	230	50/60	1.90	290	1500	72	7800	①
PEF92-500SB*E								
PEF92-500S**E	3~380	50/60	0.64					


EC轴流风机 PEF630

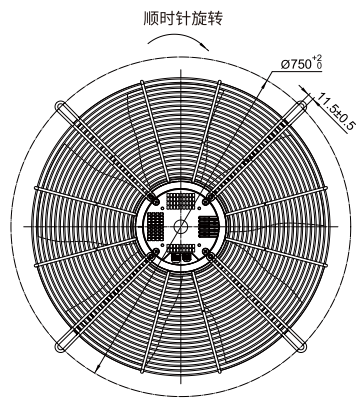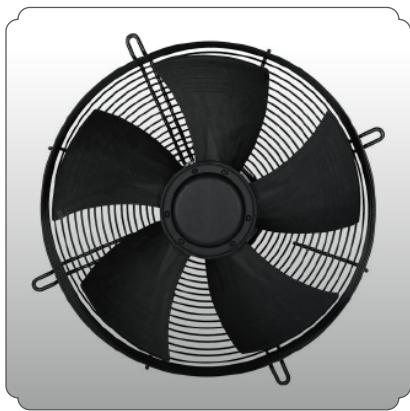


PEF137-630SA*E

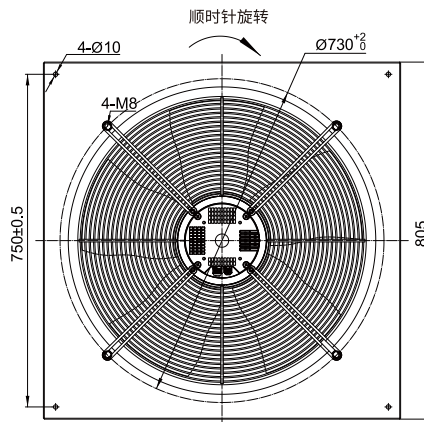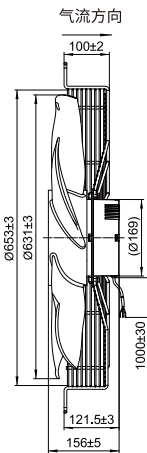

PEF137-630SD*E

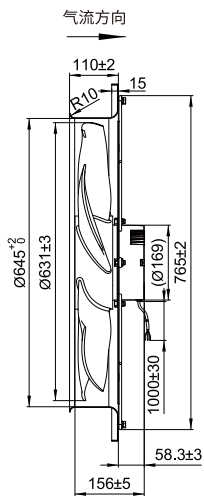


性能曲线

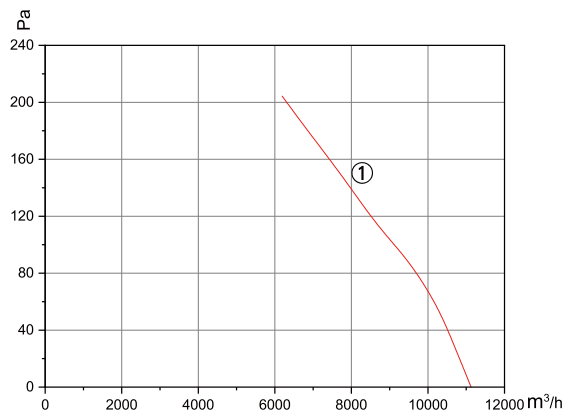

工作方式: S1
绝缘等级: F级
防护等级: IP54
环境温度: -40℃~60℃


标准型号	电压 V	频率 Hz	电流 A	功率 W	转速 rpm	噪音 db(A)	风量 m³/h	曲线
PEF 137-630SA*E	230	50/60	5.40	540	1400	76	11126	①
PEF 137-630SD*E			1.90					
PEF137-630SA*E	3~380	50/60	1.90					

EC轴流风机 PEF12038

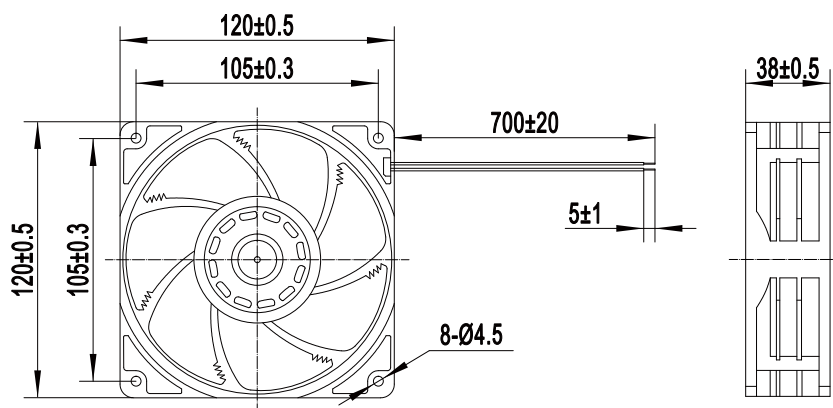

标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 φ	电流 A	额定功率 W	噪音 db(A)	风量 CFM	毫米水柱	重量 Kg
PEF12038	220	50/60	2000	120	0.040	5.0	37.0	67.2	4.8	2.55
	220	50/60	2400	120	0.060	8.0	39.0	78.0	5.9	
	220	50/60	3000	120	0.090	10.0	46.5	99.5	8.7	

EC轴流风机 PEF12025


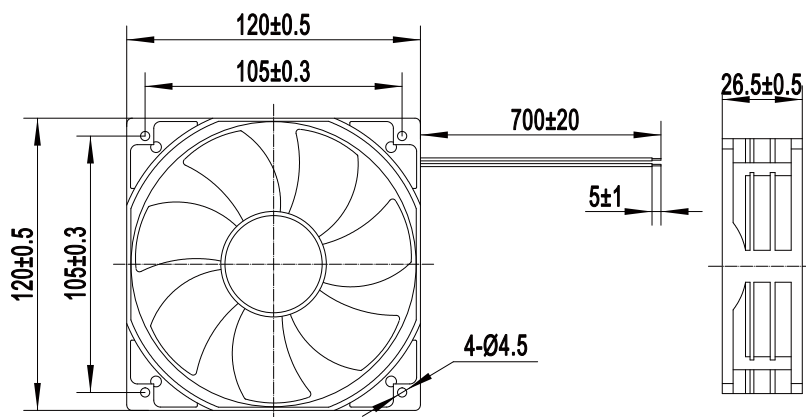


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 φ	电流 A	额定功率 W	噪音 db(A)	风量 CFM	毫米水柱	重量 Kg
PEF12025	220	50/60	2000/2300	120	0.050/0.060	2.2/2.4	30/32	58/60	3.00/3.20	1.3
	220	50/60	2400/2600	120	0.070/0.080	2.4/2.6	35/37	66/78	3.54/4.62	
	220	50/60	2700/2900	120	0.090/0.100	2.8/3.0	39/42	79/82	4.73/4.92	



AC轴流风机 PAF200




带防护网

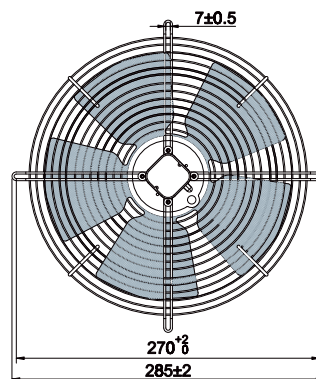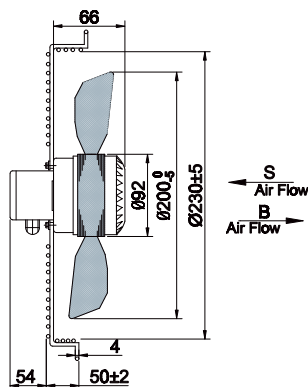

带方形框架

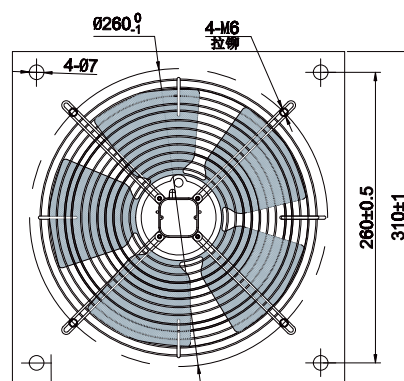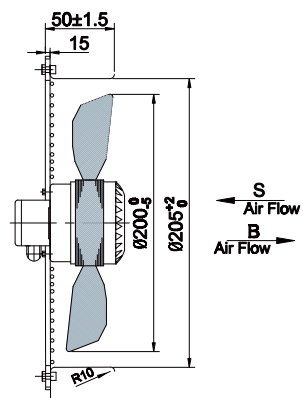

性能曲线

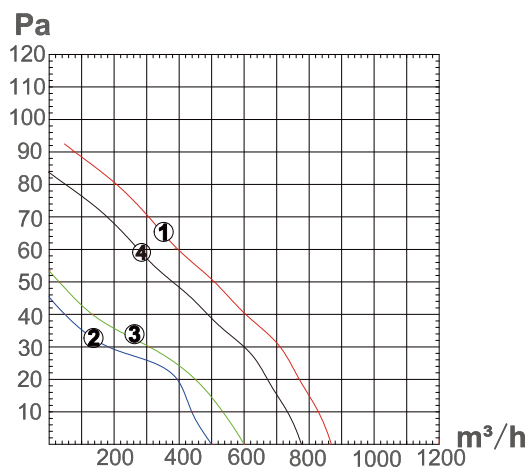



工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF2E-200-5	220	50	0.25	55	2500	2	1.8	52	790	④
PAF2E-200-7	220	50	0.25	55	2500	2	1.8	52	885	①
PAF2D-200-5	380	50	0.18	65	2500	/	1.8	52	790	④
PAF2D-200-7	380	50	0.18	65	2500	/	1.8	52	885	①
PAF4E-200	220	50	0.20	40	1400	1.5	1.8	45	500	②
	220	60	0.20	42	1700	1.5	1.8	45	600	③



AC轴流风机 PAF250




带防护网

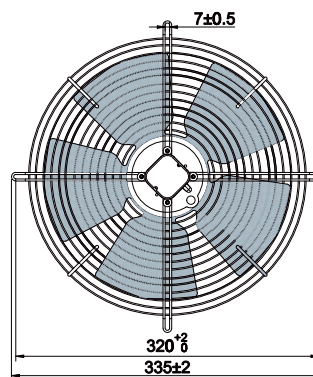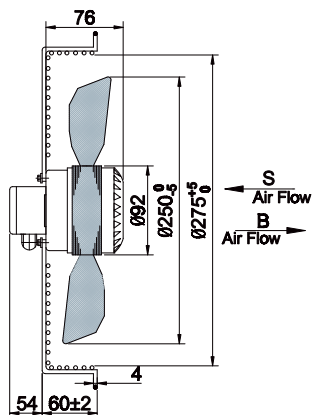

带方形框架

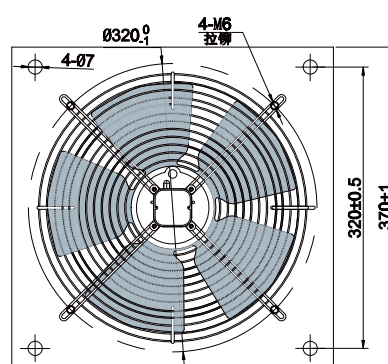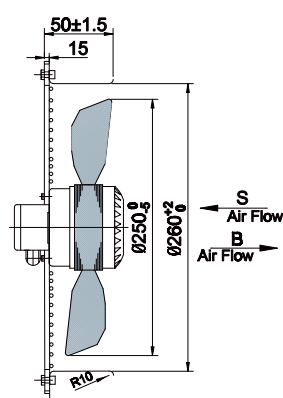


性能曲线




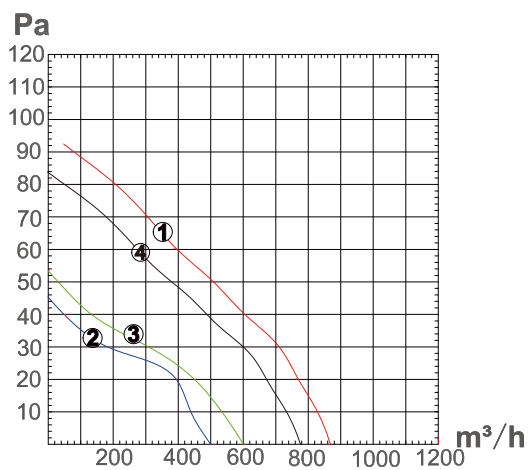


工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机


标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF2E-250-5	220	50	0.50	110	2400	4	3.0	60	1300	④
PAF2E-250-9	220	50	0.50	110	2400	4	3.0	60	1450	①
PAF2D-250-5	380	50	0.21	100	2400	/	3.0	60	1300	④
PAF2D-250-9	380	50	0.21	100	2400	/	3.0	60	1450	①
PAF4E-250	220	50	0.22	45	1400	2	3.0	55	860	③
	220	60	0.25	55	1700	2	3.0	56	1015	②
PAF4D-250	380	50	0.17	45	1400	/	3.0	56	860	③
	380	60	0.15	45	1700	/	3.0	56	1015	②

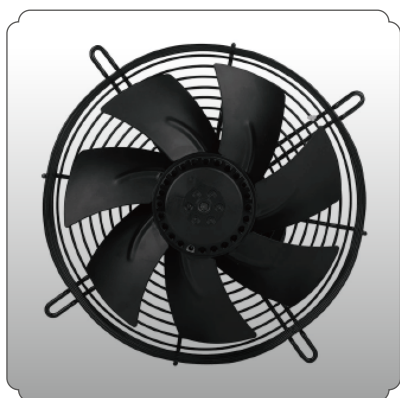

带防护网

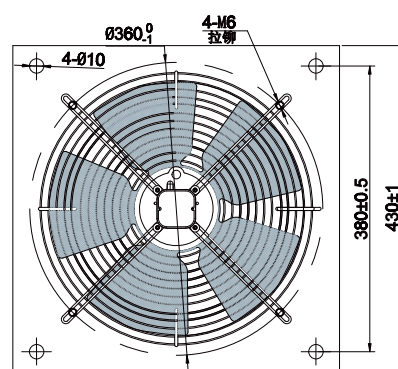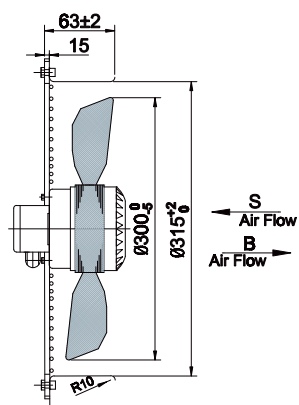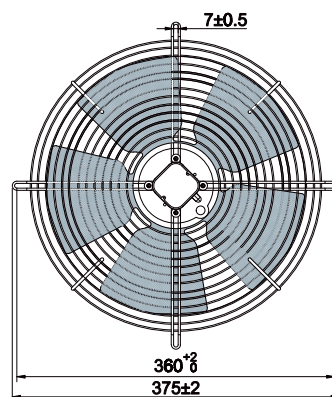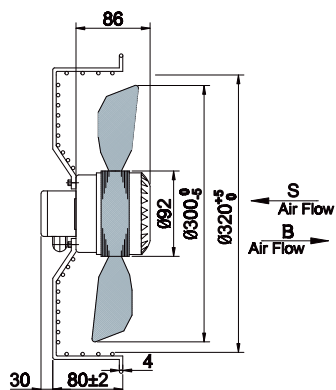

性能曲线

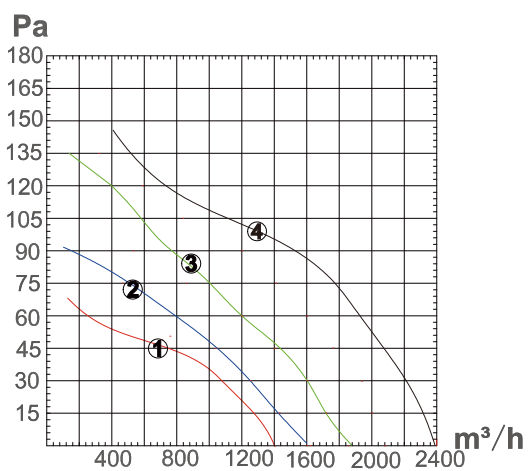


工作方式: S1
 绝缘等级: B级F级
 防护等级: IP44、IP54
 环境温度: -40℃~60℃
 电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF2E-300-7	220	50	0.65	140	2500	4	3.4	60	2400	④
PAF2D-300-7	380	50	0.28	150	2500	/	3.4	60	2400	④
PAF4E-300-5	220	50	0.38	80	1350	3	3.3	53	1460	①
	220	60	0.45	95	1550	3	3.3	55	1845	③
PAF4D-300-5	380	50	0.24	75	1380	/	3.3	53	1600	②
	380	60	0.22	90	1550	/	3.3	55	1835	③



AC轴流风机 PAF350



带防护网




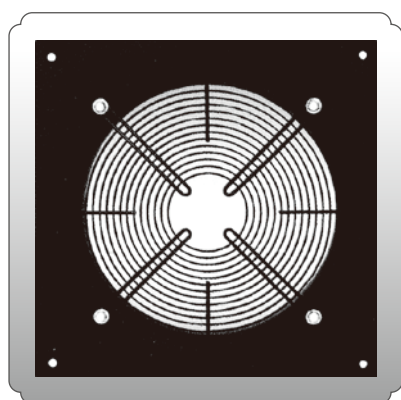


带方形框架




标准风扇

冷却风扇

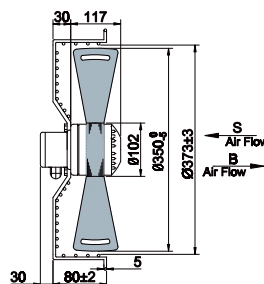

性能曲线

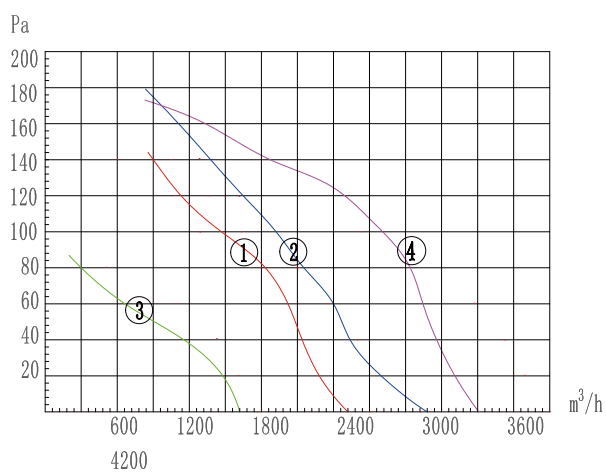


工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-350	220	50	0.65	135	1380	4	4.8	62	2450	①
	220	60	0.78	170	1600	4	4.8	62	2830	②
PAF4D-350	380	50	0.38	140	1380	/	4.8	62	2480	①
	380	60	0.35	180	1600	/	4.8	62	2810	②
PAF6E-350	220	50	0.38	80	920	3	4.8	56	1630	③
PAF6D-350	380	50	0.30	80	920	/	4.8	56	1610	③
PAF4E-350EX	220	50	0.80	180	1380	6	5.5	60	3280	④
PAF4D-350EX	380	50	0.45	180	1380	/	5.5	60	3290	④



AC轴流风机 PAF400




带防护网

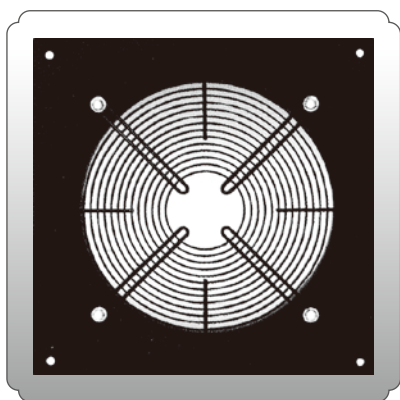




带方形框架

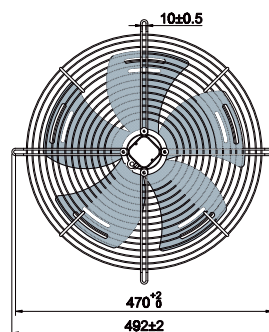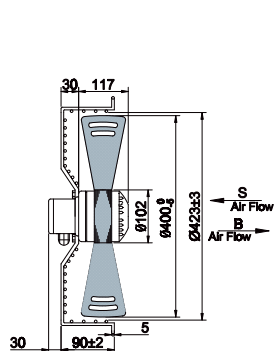


标准风扇

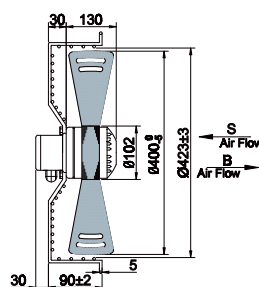

冷却风扇



性能曲线

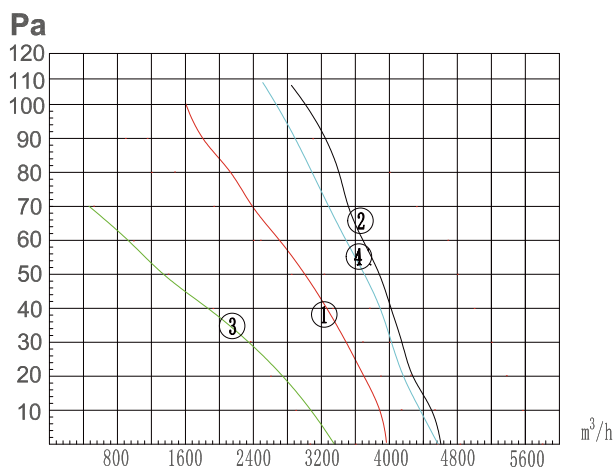




工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-400	220	50	0.82	180	1380	6	5.7	66	3980	①
	220	60	1.20	250	1550	6	5.7	66	4670	②
PAF4D-400	380	50	0.47	180	1380	/	5.7	66	3960	①
	380	60	0.47	250	1550	/	5.7	66	4590	②
PAF6E-400	220	50	0.48	100	920	4	5.7	58	3275	③
PAF6D-400	380	50	0.38	105	920	/	5.7	58	3250	③
PAF4E-400EX	220	50	1.10	230	1350	8	6.9	66	4530	④
PAF4D-400EX	380	50	0.58	230	1380	/	6.9	66	4600	④



AC轴流风机 PAF450




带防护网

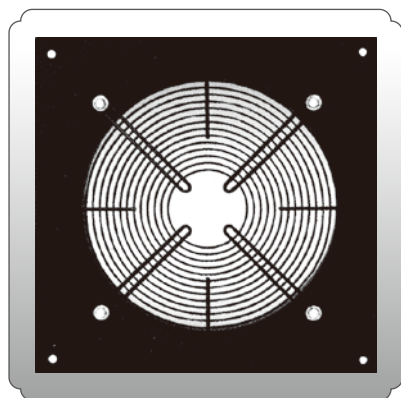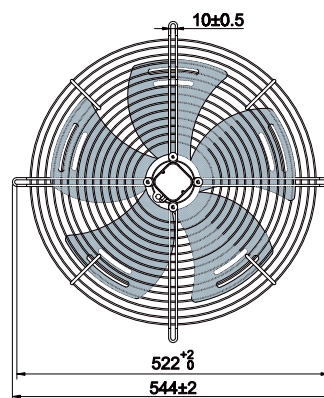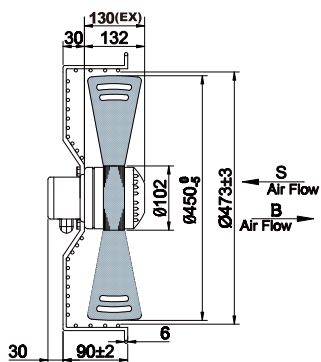

带方形框架

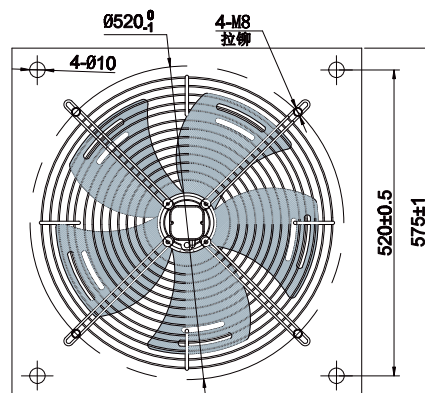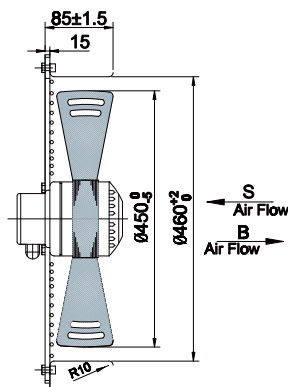

性能曲线

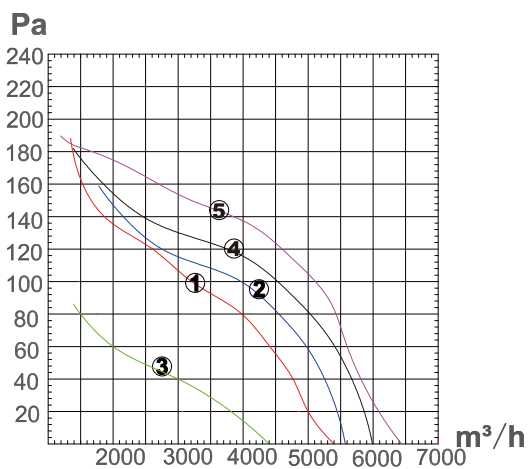

工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-450	220	50	1.20	250	1350	8	7.5	68	5380	①
	220	60	1.52	330	1500	8	7.5	68	5600	②
PAF4D-450	380	50	0.60	250	1360	/	7.5	68	5390	①
	380	60	0.60	330	1500	/	7.5	68	5620	②
PAF6E-450	220	50	0.70	150	920	6	7.5	60	4400	③
PAF6D-450	380	50	0.42	150	900	/	7.5	60	4410	③
PAF4E-450EX	220	50	1.68	365	1330	14	8.6	69	5930	
	220	60	2.50	550	1600	14	8.6	70	6390	
PAF4D-450EX	380	50	0.70	330	1350	/	8.6	69	5950	
	380	60	0.85	480	1550	/	8.6	70	6320	


AC轴流风机 PAF500

标准风扇






冷却风扇




带防护网

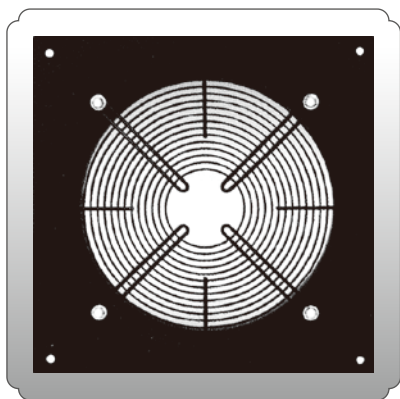

带方形框架

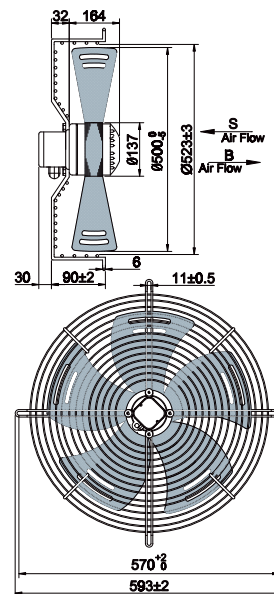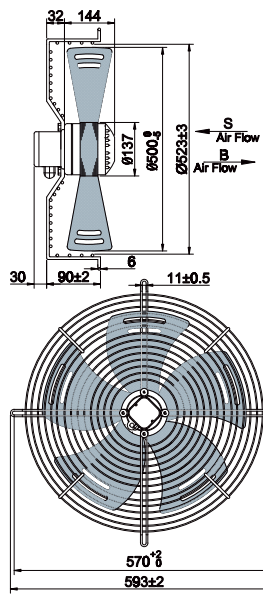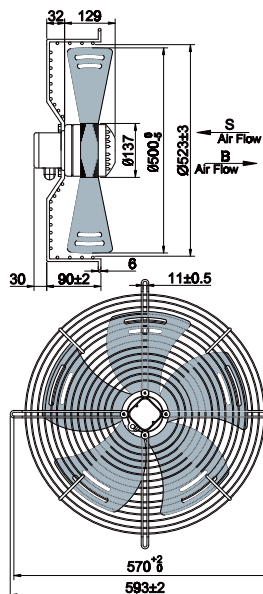

性能曲线

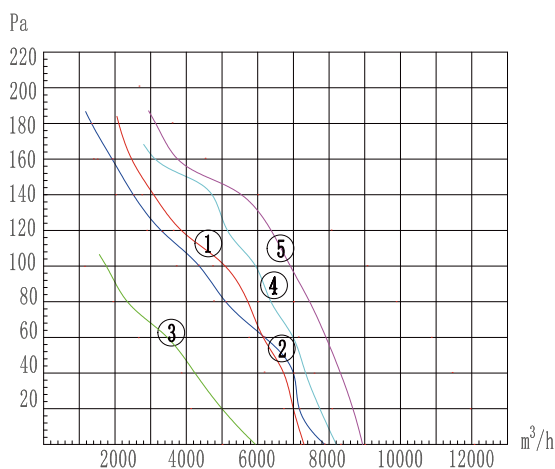


工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dB(A)	风量 m³/h	曲线
PAF4E-500	220	50	1.90	420	1300	10	9	72	7155	①
	220	60	2.55	560	1550	14	9	72	7950	②
PAF4D-500	380	50	0.90	450	1300	/	9	72	7190	①
	380	60	0.95	520	1500	/	9	72	7805	②
PAF6E-500	220	50	1.10	220	900	10	9	68	5800	③
PAF6D-500	380	50	0.55	220	900	/	9	68	5820	③
PAF4E-500EX1	220	50	2.55	550	1300	12	10.5	72	8150	④
PAF4D-500EX1	380	50	1.20	570	1300	/	10.5	72	7950	④
PAF4E-500EX2	220	50	3.20	700	1350	16	12.6	76	8900	⑤
PAF4D-500EX2	380	50	1.60	700	1360	/	12.6	76	8900	⑤



AC轴流风机 PAF550




带防护网

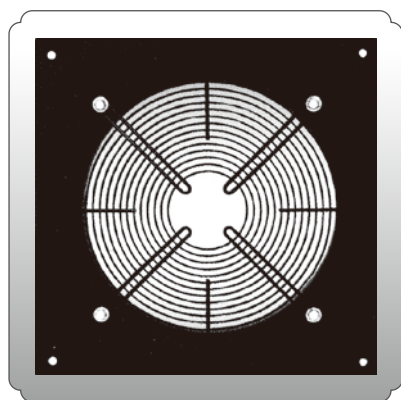




带方形框架

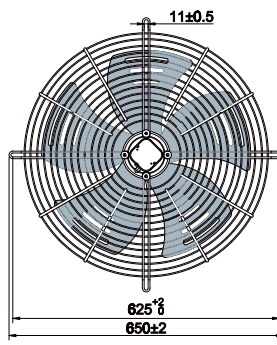


标准风扇

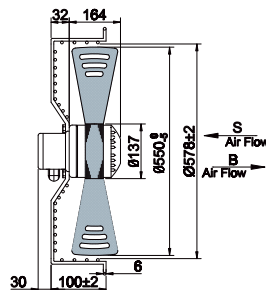

冷却风扇

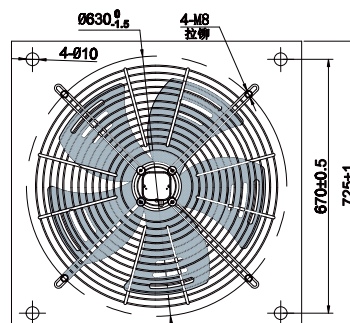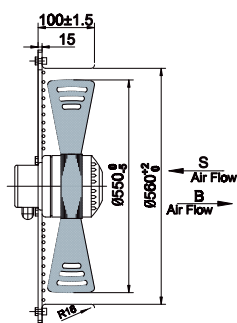

性能曲线

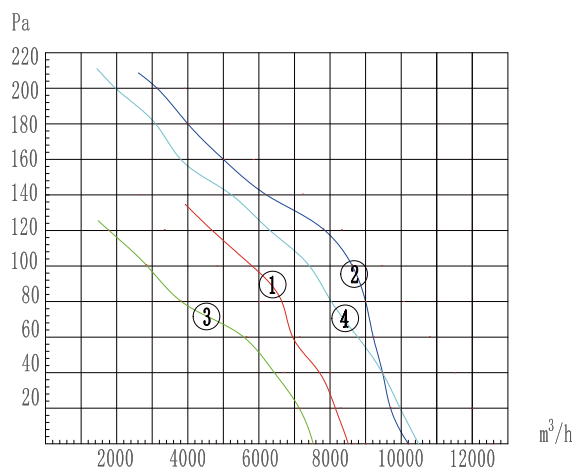




工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-550	220	50	2.55	550	1300	12	10.5	75	8550	①
	220	60	2.85	650	1600	14	10.5	75	10160	②
PAF4D-550	380	50	1.20	600	1300	/	10.5	75	8600	①
	380	60	1.45	750	1550	/	10.5	75	10100	②
PAF6E-550	220	50	1.65	320	900	10	10.5	70	7290	③
PAF6D-550	380	50	0.85	320	900	/	10.5	70	7280	③
PAF4E-550EX	220	50	3.40	750	1350	16	13	78	10250	④
PAF4D-550EX	380	50	1.60	780	1360	/	13	78	10260	④



AC轴流风机 PAF600




带防护网

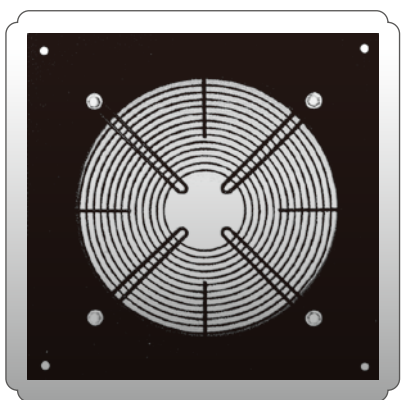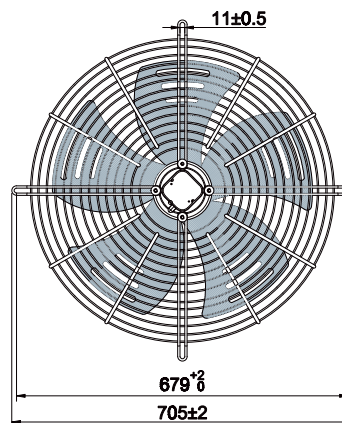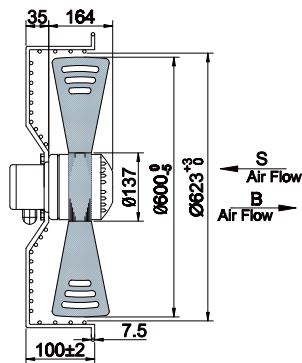

带方形框架

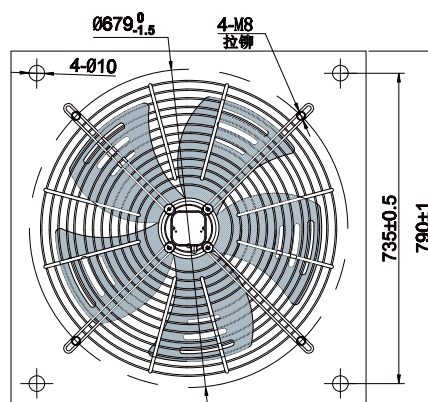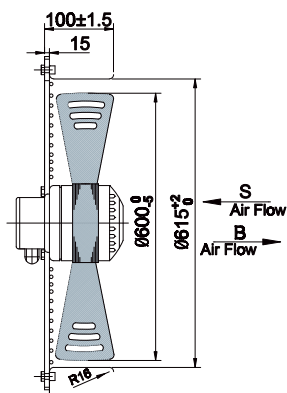

性能曲线

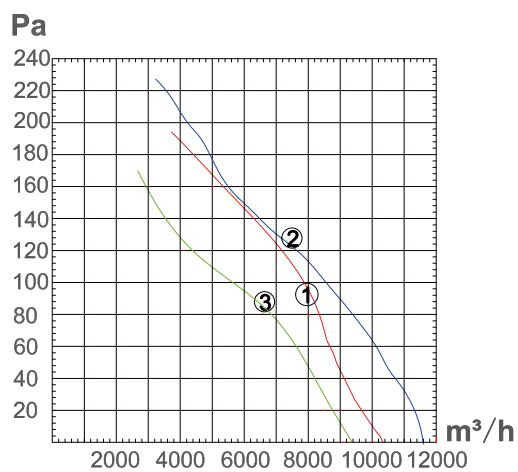




工作方式: S1
 绝缘等级: B级F级
 防护等级: IP44、IP54
 环境温度: -40℃~60℃
 电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-600	220	50	3.20	700	1360	16	14	74	10250	①
	220	60	3.85	800	1650	16	14	75	11580	②
PAF4D-600	380	50	1.60	780	1350	/	14	75	10230	①
	380	60	1.80	820	1650	/	14	75	11660	②
PAF6E-600	220	50	2.30	480	900	10	14	70	9250	③
PAF6D-600	380	50	1.50	480	900	/	14	69	9380	③



AC轴流风机 PAF630




带防护网

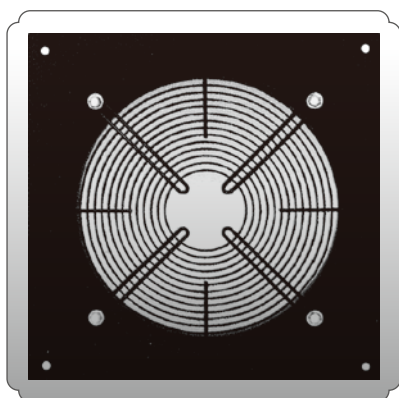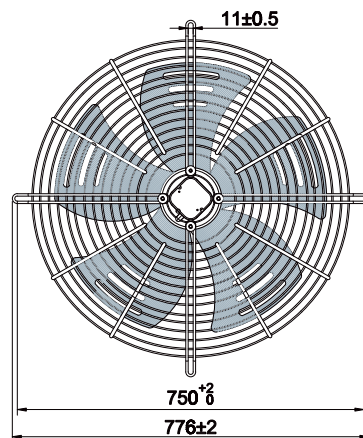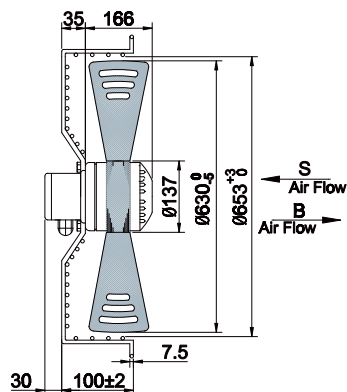

带方形框架

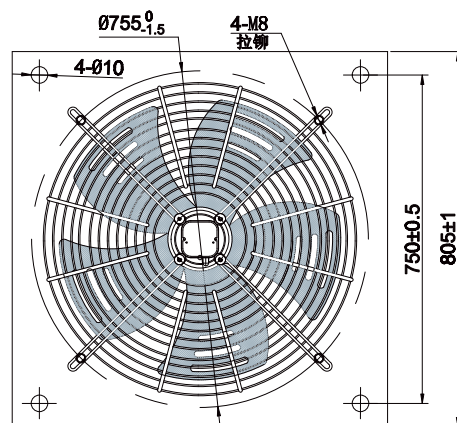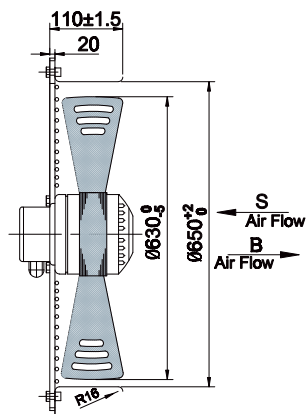

性能曲线

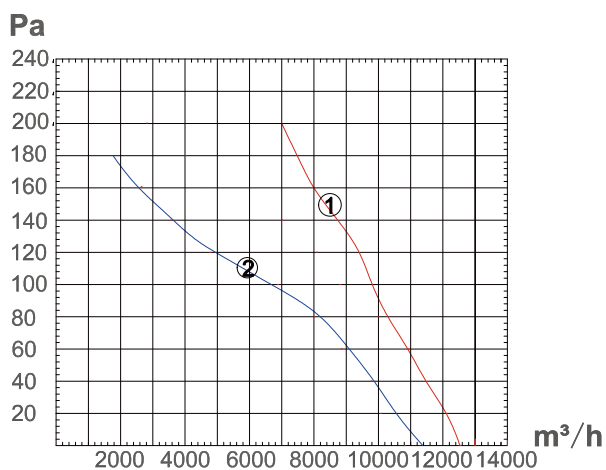

工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF4E-630	220	50	3.50	750	1360	16	15.5	75	12560	①
PAF4D-630	380	50	1.60	800	1360	/	15.5	75	12610	①
PAF6E-630	220	50	2.40	520	900	10	15.5	71	11380	②
PAF6D-630	380	50	1.50	550	900	/	15.5	71	11460	②





AC轴流风机 PAF710




带防护网



带方形框架

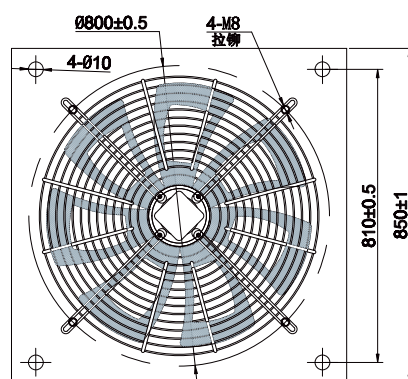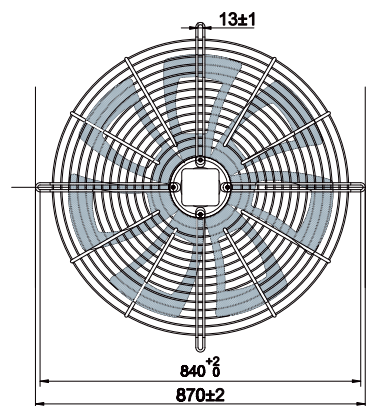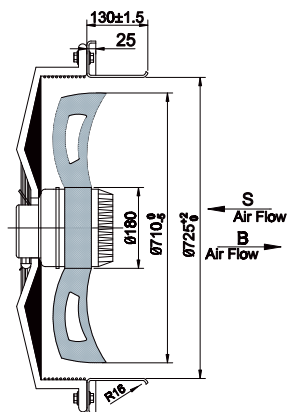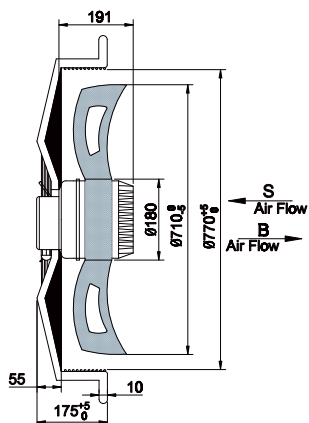

性能曲线

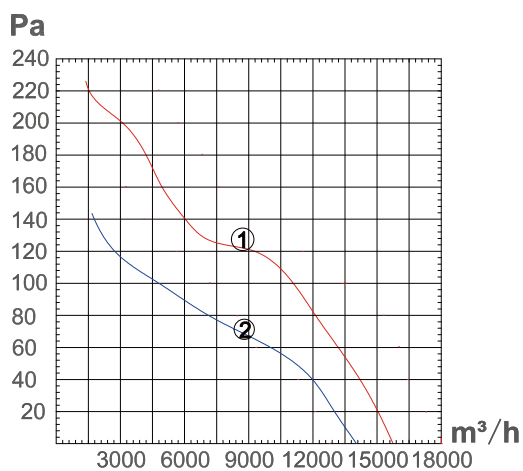



工作方式: S1
 绝缘等级: B级F级
 防护等级: IP44、IP54
 环境温度: -40℃~60℃
 电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF6D-710	380	50	2.00	1100	910	/	25	76	15380	①
	380	60	1.40	750	750	/	25	73	13560	②



AC轴流风机 PAF800




带防护网

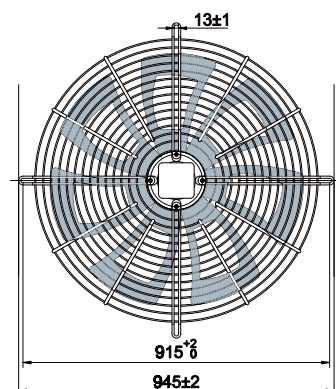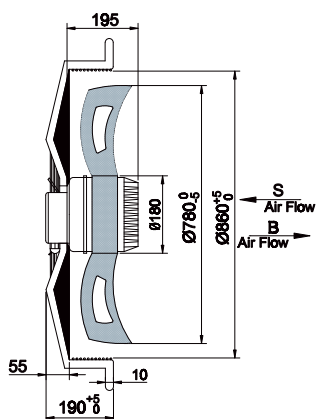

带方形框架

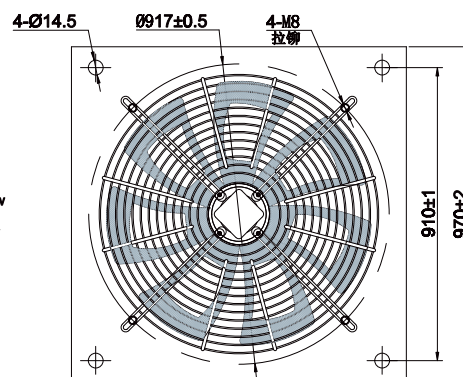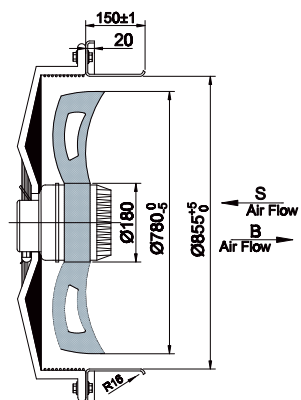

性能曲线

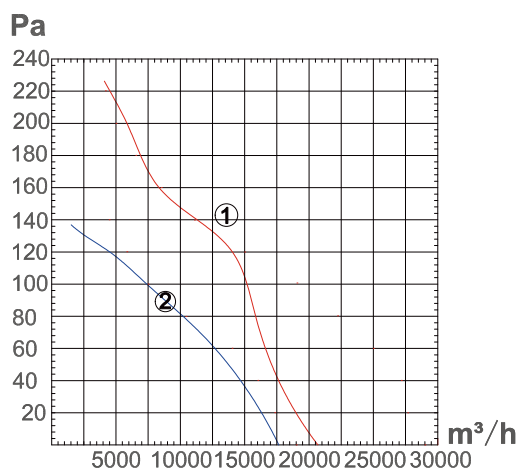



工作方式: S1
绝缘等级: B级F级
防护等级: IP44、IP54
环境温度: -40℃~60℃
电机形式: AC电机

标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF6D-800	380	50	3.25	1300	920	/	35	75	21550	①
	380	50	1.68	930	770	/	35	74	17780	②



AC轴流风机 PAF900




带防护网

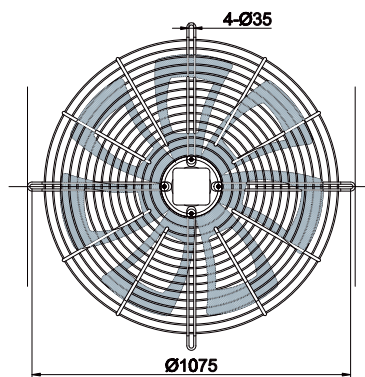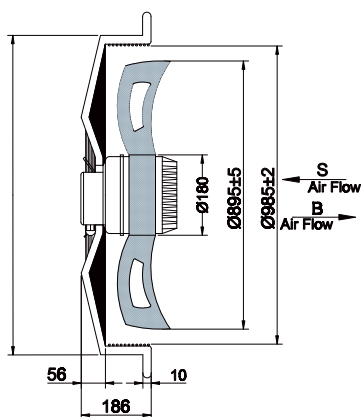

带方形框架

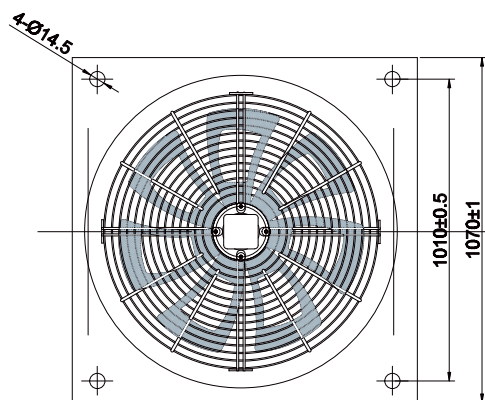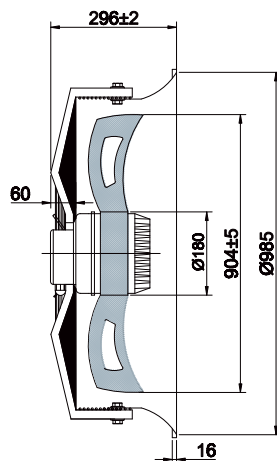



性能曲线

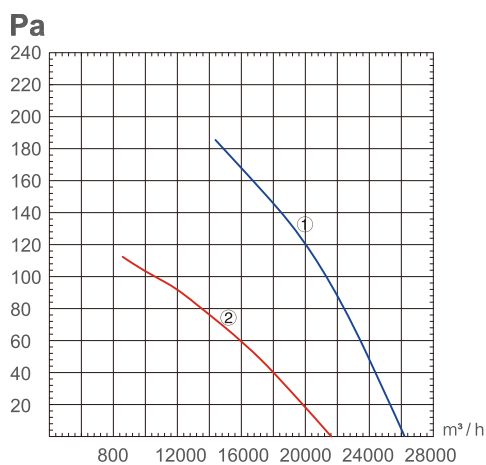

工作方式: S1
 绝缘等级: B级F级
 防护等级: IP44、IP54
 环境温度: -40°C~60°C
 电机形式: AC电机


标准型号	电压 V	频率 Hz	电流 A	输入功率 W	转速 r/min	电容 μF	重量 kg	噪音 dBA	风量 m³/h	曲线
PAF6D-900	380	50	2.00	1400	920	/	33	80	26000	①
	380	50	1.40	940	750	/	33	79	21800	②

EC 风机 PEC4810C150(DC)

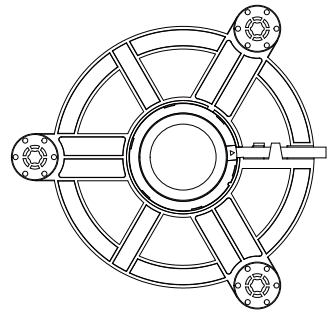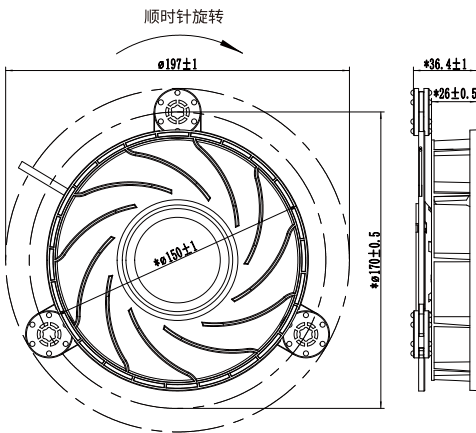



外形尺寸

性能曲线

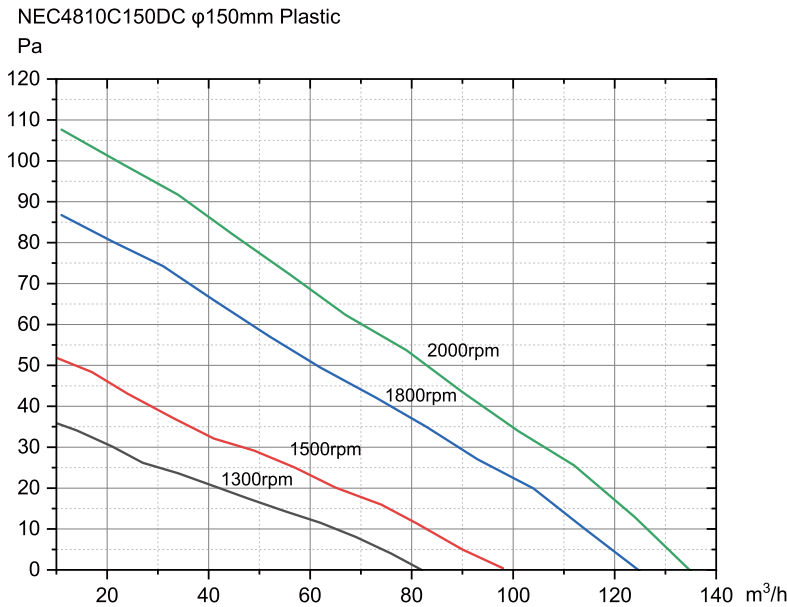


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC4810C150(DC) Plastics	24	/	1300	150	/	0.10	2.4	≤ 45	0.38	68	10
			1500			0.13	3.1				
			1800			0.20	4.8				
			2000			0.27	6.5				

EC 风机 PEC4810C170(DC)

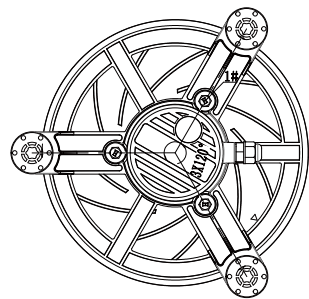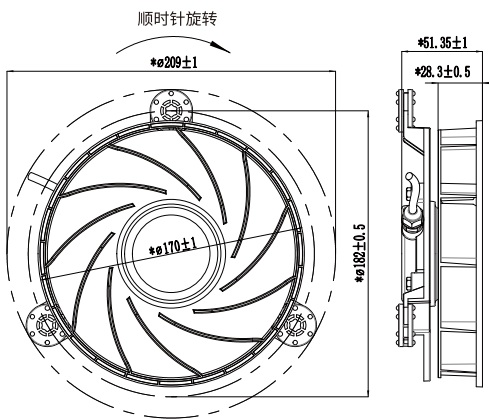


外形尺寸

性能曲线

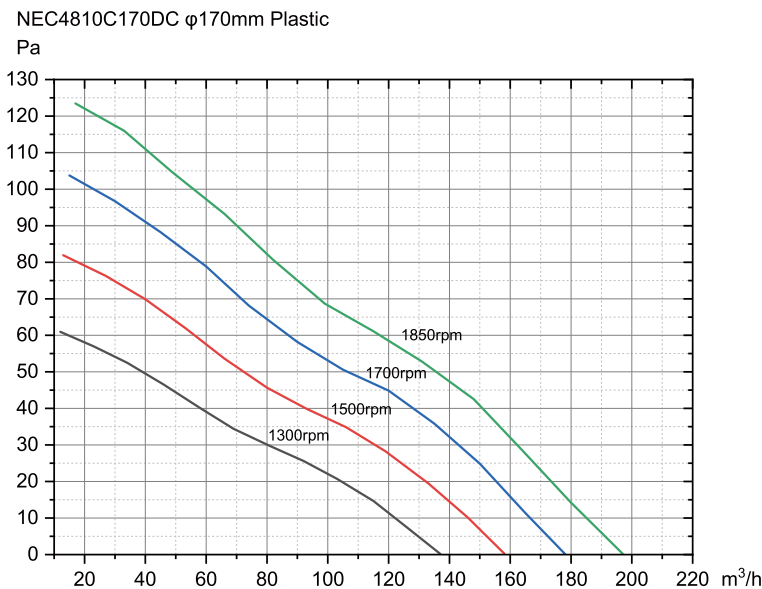


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC4810C170(DC) Plastics	24	/	1300	170	/	0.054	5.8	≤ 45	0.43	68	15
			1500			0.077	8.4				
			1700			0.107	12.0				
			1850			0.134	15.5				

EC 风机 PEC4810C170

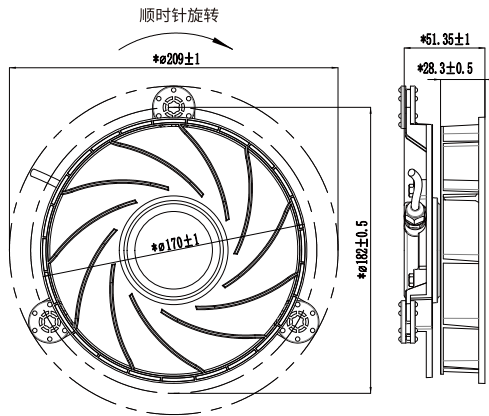


外形尺寸

性能曲线

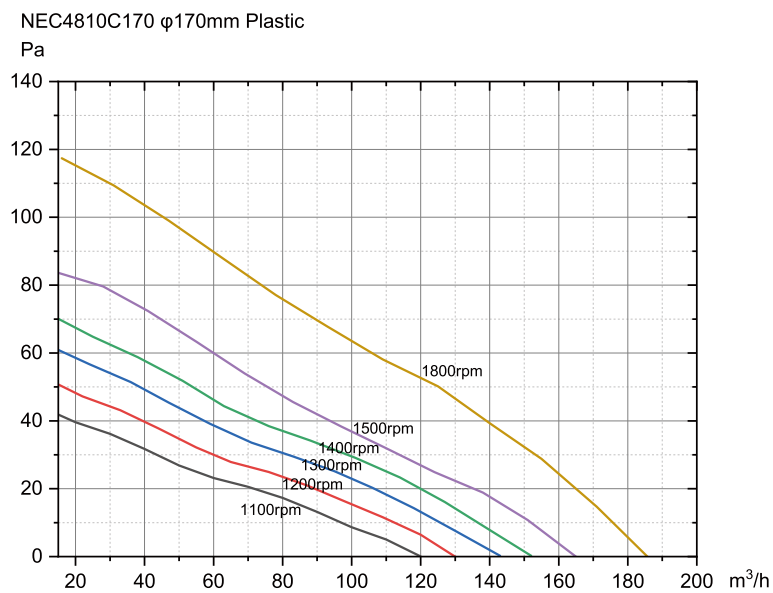


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC4810C170 Plastics	220	50/60	1100	170	/	0.037	3.9	≤ 45	0.43	68	15
			1200			0.046	4.8				
			1300			0.054	5.8				
			1400			0.064	7.0				
			1500			0.079	9.1				
			1800			0.139	15.3				


EC 风机 PFM175

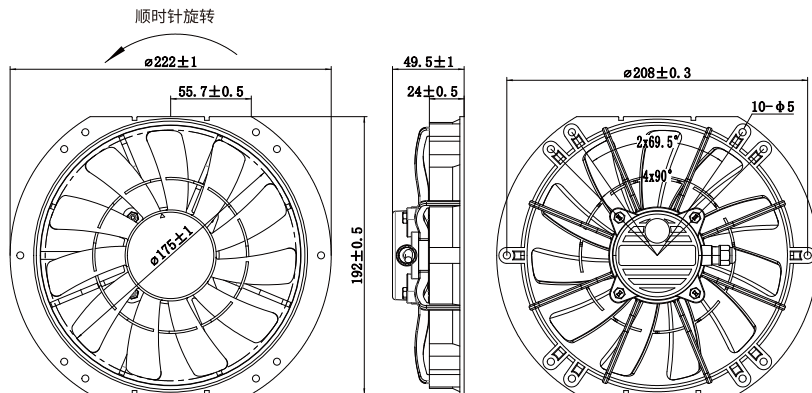

外形尺寸

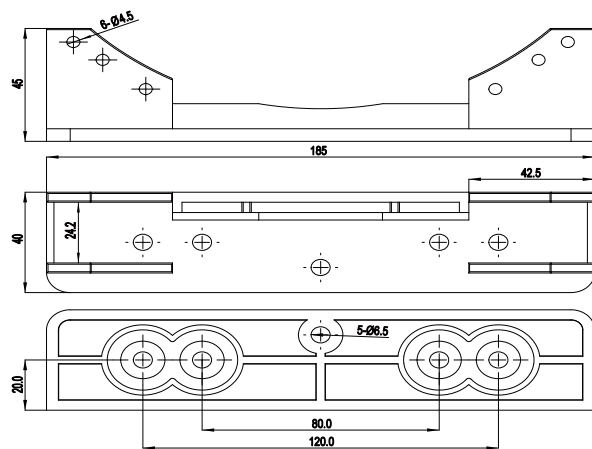


性能曲线

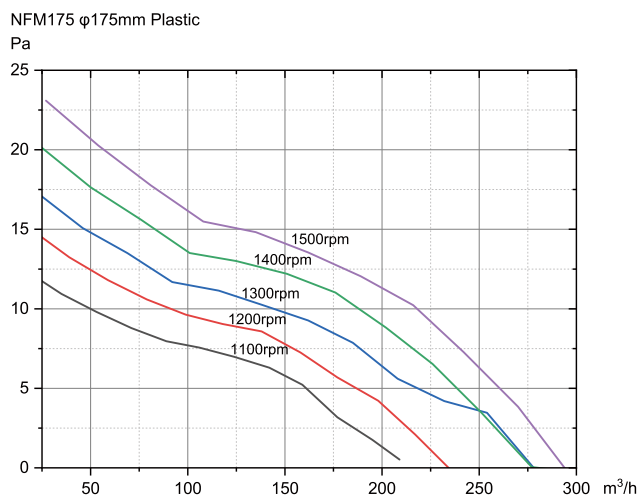


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^\circ$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PFM175 Plastics	220	50/60	1100	175	/	0.033	3.4	≤ 45	0.45	69	10
			1200			0.04	4.2				
			1300			0.048	5.2				
			1400			0.057	6.2				
			1500			0.067	7.5				


EC 风机 PFM205

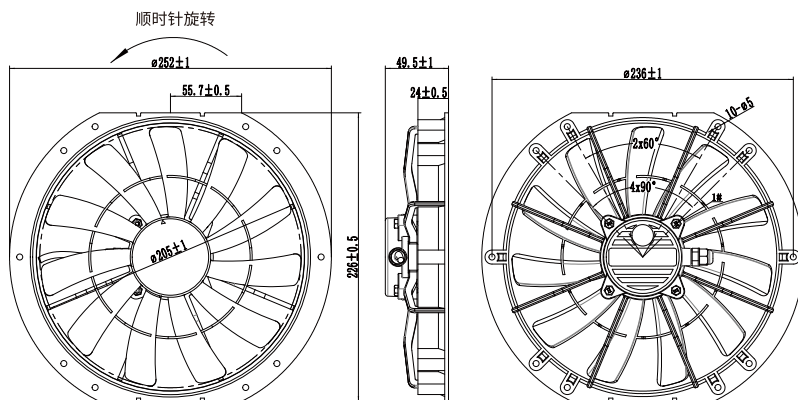

外形尺寸


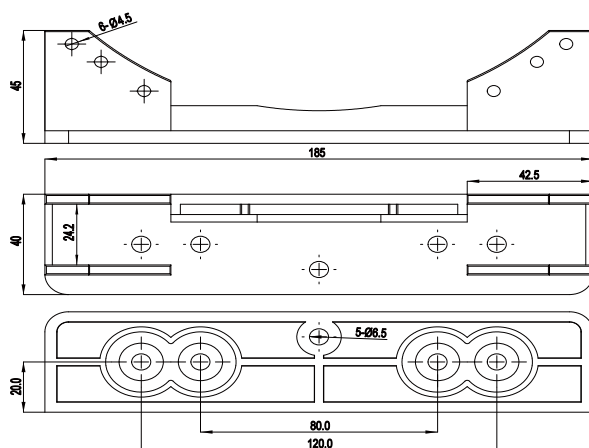


性能曲线

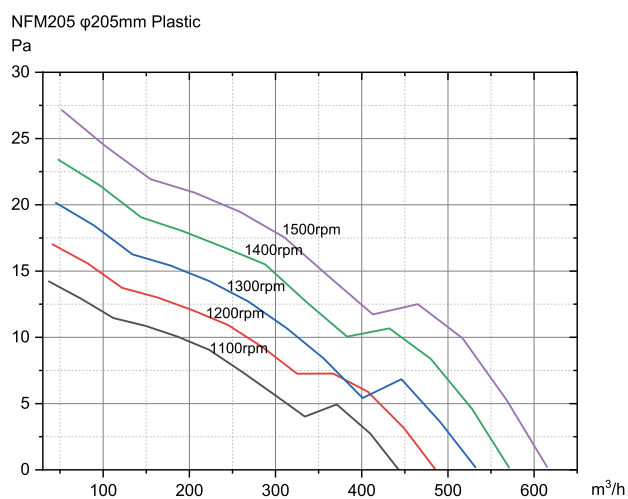


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 $\varnothing$	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PFM205 Plastics	220	50/60	1100	205	/	0.062	6.8	≤ 45	0.50	70	18
			1200			0.077	8.6				
			1300			0.101	11.3				
			1400			0.122	14.7				
			1500			0.141	17.2				

EC 风机 PEC4810R170

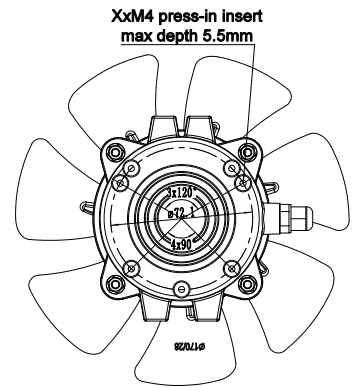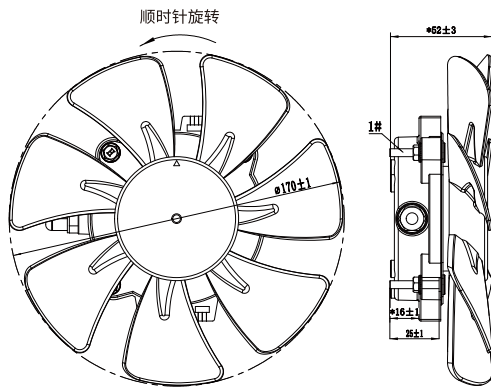


外形尺寸

性能曲线

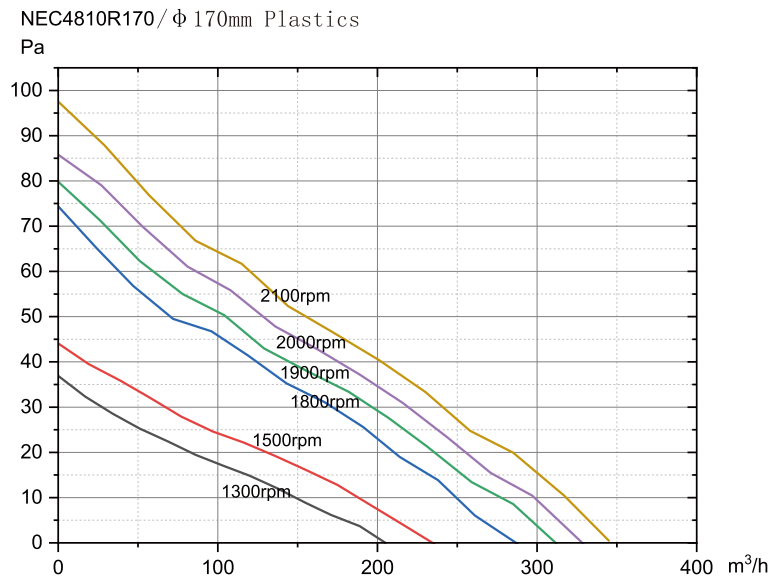

标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC4810R170 Plastics	220	50/60	1300	170	/	0.031	3.4	≤ 45	0.36	68	15
			1500			0.038	4.2				
			1800			0.056	6.2				
			1900			0.067	7.5				
			2000			0.078	8.8				
			2100			0.095	11.0				


EC 风机 PEC4810R200

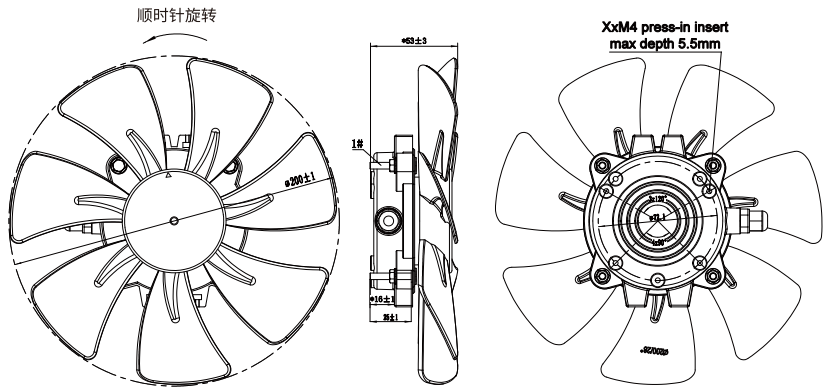

外形尺寸


性能曲线

PEC4810R200 / $\phi 200$ mm Plastics

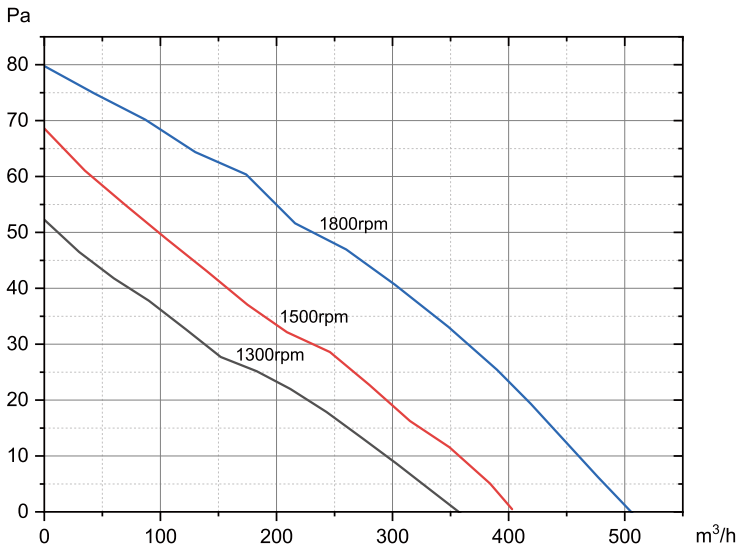

标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^{\circ}$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC4810R200 Plastics	220	50/60	1300	200	/	0.053	5.7	≤ 45	0.40	69	18
			1500			0.073	8.1				
			1800			0.111	13.0				


EC 风机 PEC6115R200

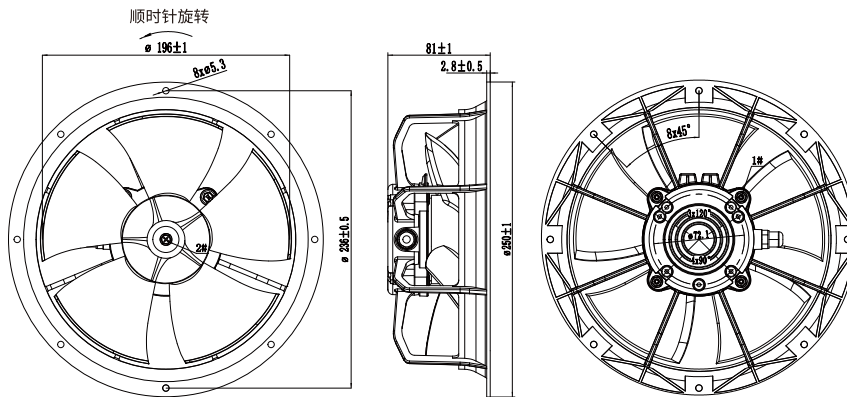

外形尺寸


性能曲线

NEC6115R200 (5 Blades) $\phi 200$ mm Plastic
Pa

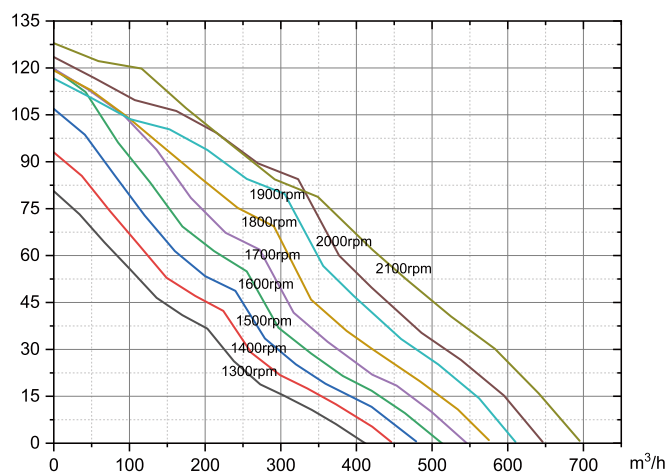


标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^\circ$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC6115R200 (5 Blades) Plastics	220	50/60	1300	200	42	0.071	8.2	≤ 45	0.7	72	30
			1400			0.084	9.9				
			1500			0.098	11.6				
			1600			0.113	13.6				
			1700			0.129	15.9				
			1800			0.15	18.3				
			1900			0.172	21.5				
			2000			0.202	25.4				
			2100			0.232	29.2				

EC 风机 PEC6115-R200

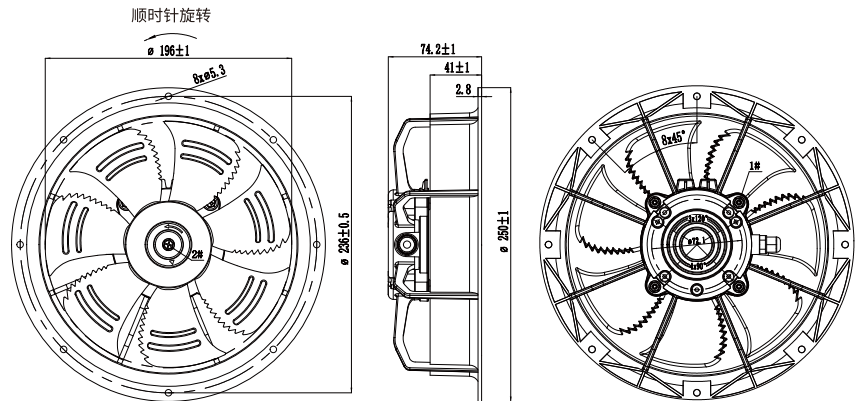

外形尺寸

性能曲线

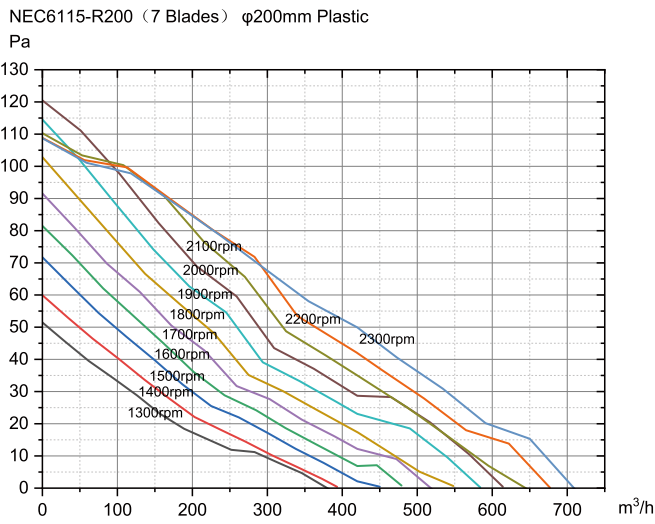

标准型号	电压 V	频率 Hz	转速 rpm	叶轮直径 ϕ	叶片角度 $^\circ$	电流 A	功率 W	噪音 db(A)	重量 Kg	效率 %	最大效率 W
PEC6115-R200 (7 Blades) Plastics	220	50/60	1300	200	34	0.056	6.1	≤ 45	0.73	72	30
			1400			0.065	7.1				
			1500			0.079	8.9				
			1600			0.088	10.1				
			1700			0.102	11.8				
			1800			0.119	14.1				
			1900			0.131	15.8				
			2000			0.151	18.6				
			2100			0.172	21.4				
			2200			0.201	25.3				
			2300			0.217	27.5				

PANKA | 澎克風機

澎克——驭风而行,低碳未来



澎克机电设备（上海）有限公司

📍 上海市长宁区遵义南路88号协泰中心2602室

☎ +86-21-54195789

✉ info@pankafan.com